ABDick 9995 Series Offset Presses

IN

0

16

-

UNIT 2 1




ABDICK 9995 SERIES TWO-TOWER OFFSET PRESSES

The ABDick 9995 Series are reliable, true two-color offset presses equipped with an array of features that simplify operation and increase productivity while consistently delivering high quality spot, multiand process color output.

This series is available in three configurations: 9995C, 9995A, and 9995A-ICS. Each features two easily accessible individual printing heads which can be operated independently for single color work or simultaneously for two-color applications.


The 9995 Series is ideally suited to work in conjunction with Presstek's DPM, Vector FL52, and Dimension Excel CTP solutions.

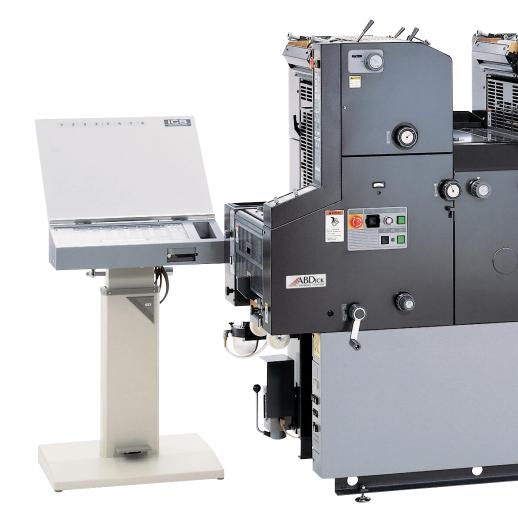

V-SHAPED, 5-CYLINDER DESIGN

The printing heads feature a V-shaped, five-cylinder configuration. The design incorporates two plate cylinders and two blanket cylinders. Separate blanket cylinders prevent ink migration for consistent color throughout the run. A common double-surface impression cylinder allows both colors to be printed without a gripper change, ensuring excellent registration.

Double sprung grippers are used on the paper feed drum and impression cylinders. A separate transfer cylinder promotes accurate paper registration. Even during high speed printing and heavy solid printing, precise registration accuracy is maintained.

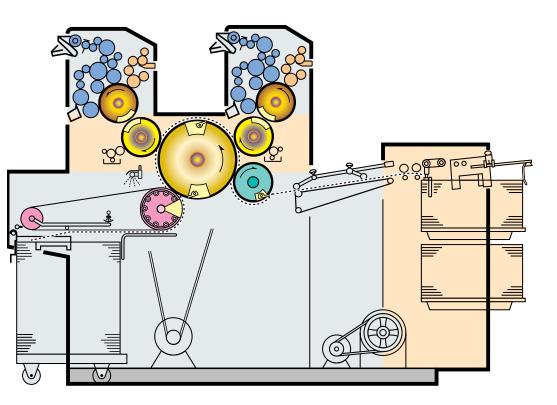



Model Shown: ABDick 9995A-ICS with Semi-Automatic Plate Inserter and Inking Control System





POLYESTER OR METAL PLATES

Achieve excellent quality using a wide range of plate materials including digitally produced polyester-based plates as well as metal offset plates.

ABDICK 9995 SERIES FEATURES

- Ink Control System Console (9995A-ICS)
- Segmented Lever-Actuated Ink Fountains (9995C, 9995A)
- Semi-Automatic Plate Inserter (9995A, 9995A-ICS)
- Straight-Edge Plate Clamp with Register Pins (9995C)
- Centralized microprocessor control
- Push button operation
- Auto-sequencing
- Motorized continuous film dampening system/Crestline Dampener 9995C
- 16-Roller ink system with 3 ink form rollers
- Ink roller cleaning attachment
- Automatic ink ductor control
- Ink volume stepless adjustment
- Impression cylinder pressure control
- Plate cylinder predetermined position stop
- Quick release blanket bars
- Paper path setup software
- Double sheet detection (mechanical)
- Static eliminator on feeder
- Paper jam detection with indicator
- Extended push guides
- Precise vertical image adjustment
- On-the-fly lateral image adjustment
- Diagonal sheet skew adjustment
- Pre-pile capability with 2 paper tables
- Chain delivery with 2 roll-away dollies
- Delivery pile automatically receding stacker and lower limit switch
- Anti off-set powder spray unit
- Preset repeat counter with batch function (electronic, 5 digits)
- Machine counter (total no. of machine rotations, 8 digits, non resettable)
- Emergency stop buttons (at each printing unit and delivery sections)
- Cylinder safety bars and safety covers
- Centralized lubrication system
- Oil pans (2)
- Standard tool kit
- Work organizer
- Blanket wash plunger can

CENTRALIZED CONTROLS

Ease of use and operator comfort are assured with lever-free operation. Pushbutton controls are concentrated at the delivery side which minimizes operator movement to allow more time for focusing on print quality.

Printing unit selection, press speed, number of prints and the dampening solution supply volume can all be set at the delivery side. An additional control panel at the feeder furthers convenience and productivity.

After makeready operations, the operator starts printing by simply pushing the production button which activates pumps, paper feed and the gradual acceleration to the desired press speed.

Inking and switching the water form roller on and off are also done simply by pushing buttons.

The handy paper size change button reduces makeready time and paper waste when changing stock sizes. One touch feeds a single sheet which automatically stops at both the feeder and delivery sections, allowing quick set-up and easy resetting of the paper guides.





centralized control panel allow simplified operation.

Push buttons on the



FEEDER & DELIVERY SYSTEMS

The universal feeder accommodates a wide range of printing jobs—from postcards and envelopes to full brochures.

Feed guides are easily adjusted and incorporate rear blowers for reliability. The system features micro-adjustment for small movements in paper stocks. A static eliminator bar in the feeder minimizes problems caused by static electricity in dry environments.

Multiple sensors monitor paper travel. When a paper jam or double sheet is detected, the press shuts down automatically, and an LCD displays indicate the source of paper trouble. Mechanical doubles detection is standard; optional electronic detectors are self-calibrating and require less operator intervention.



The pre-piling feature enhances productivity by allowing paper to be preloaded while the machine continues to run.

It's ready to go again when the last sheet of the first stack is fed.



A chain delivery with automatically lowering, roll-away paper platforms is featured on the 9995s. A capacity of 17.3" (440 mm)

lets the operator unload less often during long runs. When the delivery table limit is reached, a switch automatically shuts off paper feed so the stack does not overload.

An optional universal pile board can be used for different stock sizes and promotes easier and faster setup.

9995 INKING SYSTEMS

The 9995 Series features a 16-roller inking system, including three ink form rollers of differing diameters, that provides superior screen quality and the capability to print large, dense solids.

This system features ink ductor roller shut off. In automatic mode, the ink ductor roller operates only while printing. When the 'on' button is depressed, it operates continuously.

The drop-down ink fountain and ink roller cleanup device allow fast, easy cleaning. Ink form rollers can be released if idle to increase roller life and prevent flat spots on roller surfaces.

Presstek offers a choice of either the Ink Control System on the 9995A-ICS or the Segmented Lever-Actuated Ink Fountains on the 9995C and 9995A. Both systems are designed to simplify operation, increase productivity and ensure consistent ink balance and color tones during the run.

IVS Software options facilitate greater workflow efficiency by estimating the ink fountain key settings for newly designed print jobs. And, they do it before a single sheet has been run through the press which reduces makeready time.

OPTIONS DELIVER EXCEPTIONAL RESULTS WITH LESS EFFORT

Ink Control System (ICS)

The integrated Ink Control System (on ICS model) provides remote control over automated ink fountain keys from a standalone, delivery-side console. The operator simply 'punches in' the ink feed rate for the precise coverage needed for the image.

ICS reduces the time and effort required for ink zone adjustment resulting in quicker, more efficient make ready. It also reduces the labor involved with the continual observation and adjustment of ink densities during press runs.

Once optimal ink values for a job are obtained, those settings can be stored on a 3.5" floppy disk for easy retrieval and fast setup for future reprints.


This factory-installed system works in conjunction with the optional IVS software.

Segmented Lever-Actuated Ink Fountains

9995C and 9995A presses are equipped with segmented lever-actuated ink fountains. Split segments are laser cut into the ink blade so that each region operates independently against the fountain roll. This results in more precise ink control.

Calibrated setting numbers provide a good starting place for ink densities. Graduated levers make it possible to quickly profile the current ink supply; and by raising or lowering the levers, fine adjustments can be made to the flow of ink for better color control and image consistency.



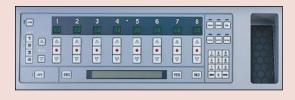



SOFTWARE AUTOMATES INK FOUNTAIN KEY SETTINGS

Ink Volume Setter (IVS) software option is designed to get the best coverage using the least amount of ink—promoting a high quality image with less set-off and faster drying times.

IVS analyzes the light and dark areas in each process color separation of a job, and based on the image data, estimates the appropriate settings for each ink key region.

IVS software delivers the digital data via a floppy disk to the ICS console which then automatically sets the ink fountain keys to the corresponding levels. IVS can be installed on Momentum RIP for DPM and Vector plate setters.

OPTIONAL REGISTER PUNCHES SIMPLIFY PLATE PREPARATION

Upgrading to one of these optional punches simplifies operation and reduces the time required for make ready and on-press adjustments.


The high-precision optical pre-register punch delivers highly accurate results. This lower cost unit lets the operator line up the image optically to the targets on a plate.

The video plate punch provides further efficiency and precision. The plate image is magnified 40x and displayed on video monitors making it easy to perfectly align register targets in a fraction of the time. It can be used with portrait and landscape presses and accepts plates up to 22 x 29" (559 x 737 mm).

EASY ADJUSTMENTS FOR EXCELLENT REGISTRATION

Dial-type image adjust-ment provides precise vertical ($\pm 20 \text{ mm}, \pm .79^{"}$) and lateral ($\pm 2 \text{ mm}, \pm .079^{"}$) control of the print image position which significantly reduces the time and effort required for registration. Lateral adjustments can be made on-the-fly for increased productivity.

A unique sheet skewing device further enhances registration capabilities. The operator can make diagonal micro adjust-ments (up to ± 0.5 mm) quickly without stopping the press.











MANUAL PLATE CLAMPS



Our 9995C model features manual, straight-edge plate clamps. Positioning pins locate the printing plate into the proper position,

allowing the operator to quickly and accurately mount plates.

A two-position lever ensures that the spring tension in the plate clamp system is optimal for either metal or polyester plates which is helpful in preventing plate stretch.

SEMI-AUTOMATIC PLATE INSERTER ON 'A' MODELS

Both the 9995A and 9995A-ICS presses feature a semi-automatic plate insertion system for easier plate handling and more accurate operation.



Printers who turn around many multicolor or shortrun jobs will find this to be an excellent time-saving feature.

With less intervention required by the operator, and no tools needed for changing plates, makeready times and paper waste are significantly reduced.

Metal or polyester plates are loaded semiautomatically by a pneumatic system which ensures reliability and precision. An operator can start printing with the touch of a button at the control panel, and precise registration is more easily achieved.





CONTINUOUS MOTORIZED FILM DAMPENING SYSTEM

A continuous motorized film dampening system is featured on the 9995 Series for excellent fountain solution control in running a variety of printing plates.

A 6-roller configuration, including a motor-driven fountain roller, forms an optimal water film on the plate surface from the start of printing.

This flexible system enables precise regulation of dampening solution supply volume to match paper stock, ink, plate materials and environmental conditions for excellent printed results.

Switching between two modes of pre-wet cycles supplies the proper water film thickness to match the plate material—metal or polyester—delivering stable quality from the start of printing.

The pre-wet switch lets the operator apply quick bursts of additional moisture to the plate surface on demand. This is helpful during setup, starting up when running silver plate material and for cleaning up plates quickly.


Moisture level sensors monitor dampening solution, and when necessary, automatically shuts off the dampener motor and paper feed and lights an indicator. Moisture rollers can be run at a slow speed for setting metering roller squeeze and unit maintenance.

The 9995A and 9995A-ICS include a chiller/recirculator that delivers full performance from the dampening system and makes it particularly suited to polyester plates and longer runs.

A Crestline Dampener is standard on the 9995C.

ALL WATER SYSTEMS ARE NOT THE SAME!

Each Crestline is designed and manufactured to carry a specific amount of water to the plate. Only high-quality components are used in Crestline dampners. This minimizes the time you need to achieve ink-water balance.



shop.presstek.com BUY SUPPLIES ONLINE! IT'S FAST, SECURE AND AVAILABLE 24/7

Visit us at shop.presstek.com to purchase supplies for your 9995 series press, pressroom supplies, parts and small equipment products.

Shop on-line and, use a payment method that's right for you—major credit card or Presstek account.

When visiting (whether registered or not), you can browse our product catalog. The catalog is divided into well-defined sections, products are easily identified, making the search for supplies, parts and other products an easy one. Logging in as a registered user gives you additional benefits such as customerspecific pricing, promotional offerings and the ability to build a custom 'my supply list' for easy future orders.

If you're new to purchasing online, or doing business with Presstek, see our FAQ section. It covers a wide range of topics about the entire ordering process.

A 'Contact Us' form lets you send questions or comments. We'll reply quickly.

Visit shop.presstek.com today, and see how we're making life a little easier for our valued customers.



ABDick 9995 Series Offset Presses

| 9995 PRESS CONFIGURATIONS FEATURE: | 9995C | 9995A | 9995-ICS | 9995A-ICS |
|---|-------|-------|----------|-----------|
| Straight-Edge Plate Clamp with Register Pins | STD | N/A | STD | N/A |
| Semi-Automatic Plate Inserter* | N/A | STD | N/A | STD |
| Segmented Lever-Actuated Ink Fountains | STD | STD | n/A | N/A |
| Ink Control System Console* | N/A | N/A | STD | STD |
| Recirculator with Level Sensors | OPT | N/A | STD | N/A |
| Chiller / Recirculator with Level Sensors 115V, 50/60Hz (1-4351); 230V, 50/60Hz (1-4352) | OPT | STD | OPT | STD |
| Hand Operated Register Punch | OPT | N/A | STD | N/A |
| High-Precision Optical Register Punch | OPT | STD | OPT | STD |
| Video Register Punch | OPT | OPT | OPT | OPT |
| IVS Ink Volume Setting Software | N/A | N/A | OPT | OPT |
| IKE Ink Key Estimator Software (for use w/DPM only) | N/A | N/A | OPT | OPT |

* Factory-installed at time of order only.

OPTIONAL ACCESSORIES

| 42010 | Infrared / Dry Powder | 42009 | Super Blue Anti-Tracking Device |
|---------|-------------------------------------|-------|---------------------------------|
| | (220 volt) | 5601 | Super Blue Replacement Net |
| 42008 | Blanket Cleaning Devices | 42004 | Optical Register Punch |
| 42003 | Electronic Double Sheet Detector | 49001 | Video Register Punch |
| | | 42006 | Print Counter |
| 42005 | Universal Paper Pile Board | 42006 | Print Counter (Total number |
| 43277 | Card Guide | 42000 | of printed sheets 8 digits non |
| 43293XC | Tape Inserter | | resettable) |

SPECIFICATIONS

| DAMPENING SYSTEM | Continuous motorized film dampener/Crestline |
|---|---|
| PRINTING SPEED | 3,000 to 10,000 IPH variable |
| MAXIMUM IMAGE AREA | 12.99" W x 17.24" L (330 x 438 mm) |
| MAXIMUM PAPER SIZE | 13.39" W x 17.72" L (340 x 450 mm) |
| MINIMUM PAPER SIZE | 3.54" W x 3.94" L (90 x 100 mm) |
| PAPER THICKNESS | .0016" to .012" (.04 to .3 mm) |
| BLANKET SYSTEM | Blanket with quick-release aluminum bars |
| PLATE SIZE | 13.19" W x 19.09" L (335 x 485 mm) |
| PLATE CLAMP TYPE | Straight-edge plate clamp with positioning pins (spring-tension system) |
| FEEDING SYSTEM | Universal feeder, 12 suction feet |
| PAPER REGISTER SYSTEM | Alternate side-to-side push guide for work-and- turn applications |
| FEEDER PILE SYSTEM | Pre-pile, capacity: 17.3" (440 mm) |
| DELIVERY SYSTEM | Chain delivery with automatic receding stacker, capacity: 17.3" (440 mm) |
| IMAGE ADJUSTMENTS | |
| | Lateral: .079" (±2.0 mm); Vertical: .79" (±20 mm) |
| SHEET SKEWING ADJ. | Lateral: .0/9" (±2.0 mm); Vertical: ./9" (±20 mm) Diagonal: ±0.5 mm |
| SHEET SKEWING ADJ. GRIPPER MARGIN | |
| | Diagonal: ±0.5 mm |
| GRIPPER MARGIN | Diagonal: ±0.5 mm 0.31" (8 mm) Ink rollers: 16 (Form rollers: 3) |
| GRIPPER MARGIN ROLLERS | Diagonal: ±0.5 mm 0.31" (8 mm) Ink rollers: 16 (Form rollers: 3) Water rollers: 6 (Form roller: 1) |
| GRIPPER MARGIN ROLLERS DIMENSIONS | Diagonal: ±0.5 mm 0.31" (8 mm) Ink rollers: 16 (Form rollers: 3) Water rollers: 6 (Form roller: 1) 92" L x 34" W x 63" H (2336 x 864 x 1600 mm) 9995C: 2,866 lbs. (1300 kg) |

Product information and specifications are subject to change without notice. Tradenames are the property of their respective owners. © 2009 Presstek, Inc.

PRESSTEK

SUPPLIES

SUBTRACTIVE METAL PLATES

| SUBIRA | | | |
|-------------|--|-----|---------|
| 57527 | Matte Blue 5.5mil 13-3/16" x 19-3/32" (335 x 485 mm) | Pkg | 50/Pkg |
| 59614 | ABDick 5.5mil Grained 13-3/16" x 19-3/32" (335 x 485 mm) | Pkg | 100/Pkg |
| 83-8-108561 | Triton Blue SC XLR-1 8mil 13-3/16" x 19-3/32" (335 x 485 mm) | Pkg | 60/Pkg |
| снемізт | RY FOR SUBTRACTIVE PLATES | | |
| 58184 | ABDick Subtractive Plate Developer for Grained Plates | Gal | 4/Cs |
| 57183 | ABDick Subtractive Plate Finisher | Gal | 4/Cs |
| | | | |

| 57184 | ABDick 2-in-1 Developer | Gal | 4/Cs |
|----------|--|--------------|-------|
| 59184 | ABDick 2-in-1 Developer for Grained Plates | Gal | 4/Cs |
| K1TCZ000 | Triton Blue Developer/Finisher | 5 Liter Btl. | 4/Cs |
| 4-1320 | ABDick Subtractive Plate Gum | Gal | 4/Cs |
| 4-9970 | Metal Plate Image Remover Pen | Each | 12/Cs |
| 4-8014 | Presensitized Plate Cleaner | Quart | 6/Cs |

POLYESTER PLATES, CHEMISTRY AND ACCESSORIES

For high quality, short-run, multi-color work, try these polyester plates and chemistries: ABDick MEGAPlus, MEGAPro, MegaPrint or QuickSilver Next Generation. Contact your Presstek representative or visit <u>shop.presstek.com for the correct plate product to fit your platemaking system and printing requirements.</u> 43493 Masking Paper 13-1/2" x 19-1/2" (343 x 495 mm) 100 Box 5/Cs

PRESS BLANKETS

| 43297 | Quick Release Blanket Holder (order 1 set per tower) | Each | Each |
|---------|--|--------|------|
| 43298-P | Conventional Quick Release Blanket w/Aluminum Bar | Case | 2/Cs |
| 43456-P | Compressible Blanket (.098) 13" x 19-1/2" (330 x 495 mm) | Case | 2/Cs |
| 43457-P | Hard Blanket (.065) | Case | 2/Cs |
| 43458 | Mylar Packer (.035) | Each | 2/Cs |
| 43461-P | Quick Release Packer | Case | 2/Cs |
| 4-6000 | Blanket Fix 30z | Bottle | 6/Cs |

INKS

| PSI-DB | Pro-Set Ink Dense Black | 5 lb./Can | Each |
|--------|-------------------------|-----------|------|
| PSI-PB | Pro-Set Ink Black | 5 lb./Can | Each |
| PSI-PC | Pro-Set Ink Cyan | 5 lb./Can | Each |
| PSI-PM | Pro-Set Ink Magenta | 5 lb./Can | Each |
| PSLPY | Pro-Set Ink Yellow | 5 lb/Can | Each |

FOUNTAIN CONCENTRATE / ADDITIVES

| ALCOH | DL / REPLACEMENT | | |
|--------|--|------|----------|
| 38704 | Silver-Wet Fountain Wetting Additive for MEGA Plates | Case | 6/Cs |
| 4-H20 | Deionized Press Water | Gal | 4Gal/Cse |
| 38778 | MEGA CMS+ Fountain Concentrate pH 4.0 | Gal | 1/Cs |
| 4-1195 | Universal Fountain Concentrate pH 5.6-6.0 | Gal | 4/Cs |
| 4-1185 | PROformace Fountain Concentrate pH 4.3-4.5 | Gal | 4/Cs |
| | | | |

| 4-1172 | Isopropyl Alcohol | Gal | 1/Cs |
|--------|--------------------------------|-------|------|
| 4-1177 | Isopropyl Alcohol Substitute | Gal | 4/Cs |
| 4-1275 | SureDot Alcohol Replacement | Gal | 4/Cs |
| 38702 | Silver-Sub Alcohol Replacement | Liter | 6/Cs |
| ЕТСН | | | |

4-1015 Blue Etch Gal 4/Cs 38766 MEGA Etch Case 6 Qts/Cs

BLANKET / ROLLER WASH

| 4-1235 | Automatic Blanket Wash | Gal | 4/Cs |
|--------|---|-------------|------|
| 4-1200 | Safety Zone Blanket Wash | Gal | 4/Cs |
| 4-1238 | SureDot Watermiscible Blanket Wash (Pre-Diluted) | (2) 2.5 Gal | Case |
| 4-1248 | SureDot Watermiscible Blanket Wash (Concentrated) | 5 Gal | Each |
| 4-4315 | Blanket Wash | Gal | 4/Cs |
| | | | |

ROLLER MAINTENANCE SUPPLIES

| 36797 | Cleaner Sheets 13-5/8" x 19-3/8" (346 x 492 mm) | 100/Pkg | 5/Cs |
|-------------|---|-----------|-------|
| 4-1249 | SureDot Meter Water Roll Cleaner | Quart | 4/Cs |
| 83-5-101395 | Chrome Cylinder Cleaner | Pint | 12/Cs |
| 4-4968 | Glaze Remover | Pint | 2/Cs |
| 4-4970 | Ink Roller Desensitizer | Pint | 12/Cs |
| 4-4976 | Ink Roller Conditioner | 16 oz/Btl | 4/Cs |
| 4-4978 | Ink Roller Paste Deglazer | 17 oz/Btl | 6/Cs |
| 4-4983 | Ink Roller Cleaner | 7 oz/Btl | 6/Cs |

MISCELLANEOUS SUPPLIES

| 3-3599 | Dry Roller Lube | 3Lb. | Each |
|-----------|--|---------------|---------|
| 4-4931-CS | Cotton Pads 4" x 4" (101 x 101 mm) | 100 Wipes/Pkg | 20/Case |
| 4-4940 | Heavy Duty Shop Towel Bundles | 375/Cs | Case |
| 4-4945 | Heavy Duty Shop Towel Rolls | 2 Roll/Cs | Case |
| 4-4991 | Vinyl Glove (Medium) | 100/Box | 10/Cs |
| 4-4992 | Vinyl Glove (Large) | 100/Box | 10/Cs |
| 4-4938 | Hand Cleaner | 12 oz/Btl | 12/Cs |
| 4-4939 | Hand Cleaner With Pump | 1/2 Gal/Btl | 6/Cs |
| 4-4988 | Grit Hand Cleaner | 17 oz/Btl | 6/Cs |
| 4-1362 | Kresto EF Hand Cleaner (250ml) | Tube | 24/Cs |
| 4-4948 | Handy-Klnz Pro Premoistened Hand Wipes | 72/Bucket | 6/Cs |
| 4-3800 | Offset Spray Powder - 26 Micron | 5 Lb. | Box |
| 9-1003-EA | Squeeze Bottle | Bottle | 24/Cs |
| 9-2255 | Stouffer 21 Step Gray Scale | Each | Each |
| 5601 | Super Blue Replacement Net | Kit | 6/Kit |

Some products listed above are available in larger quantities. For a complete list of 9995 Series Offset Press and other supplies and pressroom products, visit us online at **shop.presstek.com** where you can browse the entire catalog and place orders 24/7.

55 Executive Drive, Hudson, NH 03051 Tel. 603-595-7000 www.presstek.com 9-2454 11/09